

Disassembling

1. Leave the prepared communion cup tray under the Juice Container until the power source has been disconnected.



2. Lift the Stabilizer Arm straight up and away from the Juice Container.



3. Unplug the Power Cord from the Plug on the Stabilizer Arm to disconnect the power source.




4. Remove the Battery from the Power Box by lifting straight up.



5. Set the Battery on its side.



6. Secure the Power Box Cord by wrapping it around the Power Box and placing it in the holder.

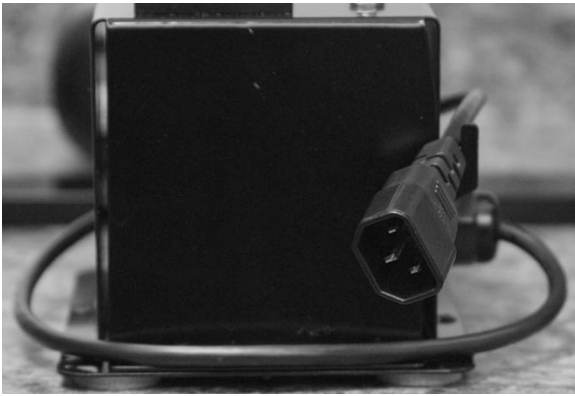


7. Plug the Recharging Station into a functioning electrical outlet.



8. Plug the Battery into the Recharging Station.



- a. When the Battery is plugged in properly a blinking green light will appear.
- b. A solid green light indicates that the Battery is fully charged.

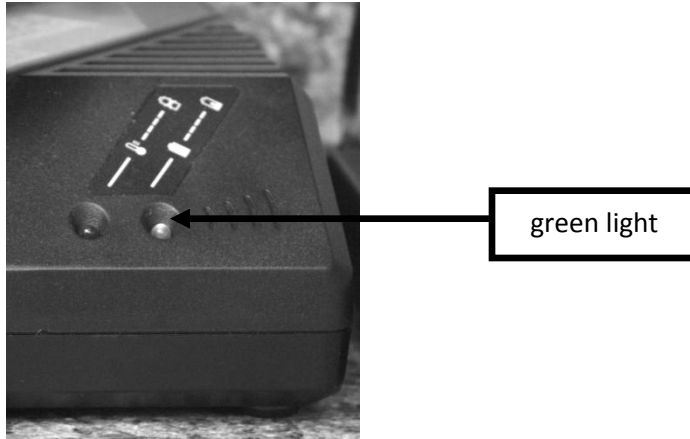

9. Remove the Battery from the Recharging Station when the solid green light appears.



NOTE - DO NOT leave the Battery plugged into the Recharging Station for more than 4 hours. Doing so will shorten the life of the Battery.

10. Unplug the Recharging Station from the electrical outlet.



11. Store the Power Box, the Battery and the Recharging Station in a safe, dry place.



NOTE: Because there will be drips, a communion tray filled with cups should be positioned under the Juice Container at the beginning of the assembling process and removed from under the Juice Container after communion preparation is completed.

12. Remove the communion tray from underneath the Juice Container.



13. Place the Juice Container in the sink.



NOTE - The Plunger must NEVER be placed upright on any surface. In order to ensure the integrity of the seal ALWAYS set the Plunger on its side and ALWAYS secure it against a stationary object to avoid rolling.

14. To prepare the unit for washing, grasp the Plunger by the Plunger Rod with both hands.
15. Lift the Plunger straight up and remove it from the Juice Container. The remaining liquid will drain into the sink.

